


Shrink Discs

RINGFEDER® RfN 4091

Heavy series for the highest torque

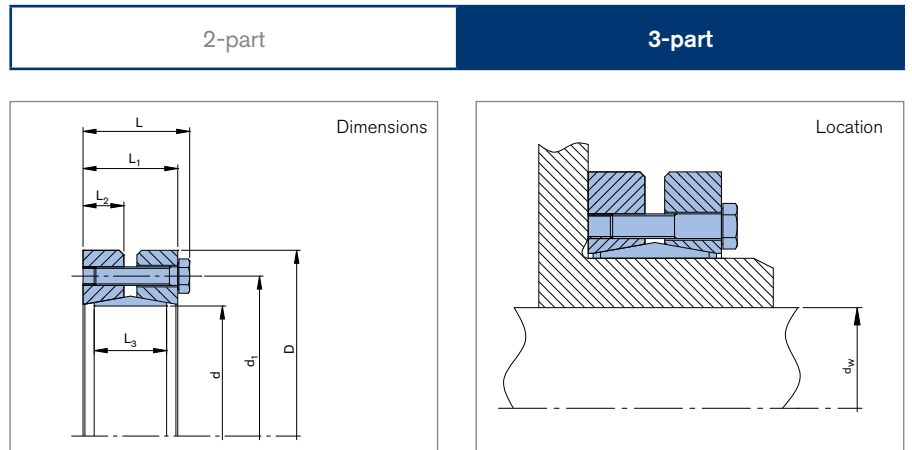

Shrink Discs dimensions											Transmissible torques or axial forces				Locking screws			
d	x	D	d _w	d ₁	L	L ₁	L ₂	L ₃	L _B	T _A	T	F _{ax}	P	σ _v	ISO 4014/4017 - 10.9			T _{max}
mm		mm	mm	mm	mm	mm	mm	mm	mm	Nm	Nm	kN	N/mm ²	N/mm ²	n _{Sc}	D _G	G _w	Nm
															Stück	mm	kg	
50	x	95	38	73	44,5	39	17	30	23	25	1800	106	285	410	7	M8	1,4	2250
			2100								115	447		2625				
			2400								124	511		3000				
55	x	105	42	78	44,5	39	17	30	23	28	2250	122	290	404	7	M8	1,7	2813
			2700								135	457		3375				
			3200								148	574		4000				
62	x	115	48	85	44,5	39	17	30	23	30	2950	134	276	376	7	M8	2	3688
			3400								142	401		4250				
			3600								145	458		4500				
68	x	118	50	93	49	44	19	34	27	30	3600	147	260	334	8	M8	2,1	4500
			4600								168	362		5750				
			5700								190	475		7125				
75	x	145	55	105	53	46	20	36	27	59	4600	193	302	403	7	M10	3,8	5750
			5700								221	437		7125				
			7000								249	540		8750				
80	x	145	60	105	53	46	20	36	27	59	5700	200	283	379	7	M10	3,6	7125
			7000								226	413		8750				
			8400								253	510		10500				
90	x	160	65	116	57	50	22	40	29	59	6700	217	259	339	8	M10	4,8	8375
			8100								243	352		10125				
			9600								269	395		12000				
100	x	170	70	126	61	54	23	44	32	59	8800	265	265	334	10	M10	5,6	11000
			10000								293	342		12500				
			12200								321	368		15250				

To continue see next page

Shrink Discs RINGFEDER® RfN 4091

Shrink Discs dimensions										Transmissible torques or axial forces				Locking screws				
d	x	D	d _w	d ₁	L	L ₁	L ₂	L ₃	L _B	T _A	T	F _{ax}	P	σ _v	ISO 4014/4017 - 10.9			T _{max}
mm			mm	mm	mm	mm	mm	mm	mm	Nm	Nm	kN	N/mm ²	N/mm ²	n _{Sc}	D _G	G _w	T _{max}
															Stück	mm	kg	Nm
110	x	185	75	138	67	60	26	50	35	59	11000	308	254	316	12	M10	7,6	13750
			80								12900	338						16125
			85								14700	352						18375
125	x	215	85	160	73	65	28	55	37,5	100	15000	355	248	331	10	M12	11	18750
			90								17500	388						21875
			95								20000	422						25000
135	x	212	90	172	85	77	32	60	45	100	18800	420	251	330	12	M12	10,7	22500
			95								21600	456						27000
			105								27800	531						34750
140	x	300	90	220	106	96	42	80	54	250	36700	817	360	423	12	M16	35,5	45850
			100								47000	942						58750
			110								58700	1096						73350
155	x	263	105	197	91,5	84	35	66	45	100	28900	551	248	310	15	M12	19,6	36100
			110								32400	590						40500
			115								36200	630						45250
165	x	290	115	210	98	88	38	72	49	250	41000	740	270	324	10	M16	26	51250
			120								46000	785						57500
			125								50700	815						63375
175	x	300	125	220	124	114	50	92	59	250	72800	1165	301	367	15	M16	36,5	91000
			130								79900	1230						99850
			135								87300	1294						109100
185	x	330	135	236	122	112	50	92	61	250	72000	1100	263	327	14	M16	47	90000
			140								78000	1150						97500
			145								86000	1200						107500
190	x	350	135	239	129	116,5	50	92	62	470	95100	1409	331	386	12	M20	55	118850
			140								103400	1478						129250
			155								130600	1685						163250
195	x	350	140	246	122	112	50	92	63,5	250	75000	1075	250	310	14	M16	53	93750
			150								88000	1180						110000
			155								96000	1235						120000
200	x	350	145	246	122	112	50	92	63,5	250	85000	1170	261	317	15	M16	50	106250
			150								92500	1230						115625
			155								100000	1290						125000
220	x	370	160	270	144	134	60	114	74,5	250	127000	1590	255	309	20	M16	65	158750
			165								136000	1650						170000
			170								146500	1720						183125
240	x	405	170	295	157	144	65	120	79,5	490	155000	1820	261	305	15	M20	87	193750
			180								176000	1960						220000
			190								198000	2080						247500
260	x	430	190	321	173	160	72	136	87,5	490	213000	2260	255	308	18	M20	100	266250
			200								240000	2420						300000
			210								268000	2580						335000
280	x	460	210	346	185	172	78	148	96	490	285000	2740	254	310	21	M20	132	356250
			220								320000	2910						400000
			230								355000	3090						443750
300	x	485	230	364	189	176	80	152	98	490	341000	2960	242	298	22	M20	140	426250
			240								376000	3130						470000
			245								394000	3215						492500

To continue see next page

Shrink Discs RINGFEDER® RfN 4091

Shrink Discs dimensions										Transmissible torques or axial forces				Locking screws				
d	x	D	d _w	d ₁	L	L ₁	L ₂	L ₃	L _B	T _A	T	F _{ax}	P	σ _v	ISO 4014/4017 - 10.9			T _{max}
mm			mm	mm	mm	mm	mm	mm	mm	Nm	Nm	kN	N/mm ²	N/mm ²	n _{Sc}	D _G	G _w	T _{max}
															Stück	mm	kg	Nm
320	x	520	240	386	196,5	184	82	160	102	490	378000	3150	235	282	24	M20	165	472500
			250								415000	3325						518750
			260								451000	3470						563750
340	x	570	250	420	215	200	92	176	110	840	489500	3910	253	295	21	M24	240	611875
			260								530000	4075						662500
			270								578000	4275						722500
350	x	580	270	425	215	200	92	176	110	840	556000	4122	247	304	21	M24	247	695000
			280								604000	4320						755000
			285								629000	4415						786250
360	x	590	280	432	219	204	92	180	114,5	840	612000	4370	245	303	22	M24	250	765000
			290								663000	4570						828750
			295								689000	4670						861250
380	x	645	290	458	219	204	92	180	114,5	840	618000	4270	233	279	22	M24	320	772500
			300								668000	4455						835000
			310								719000	4645						898750
390	x	660	300	468	227	212	96	188	118,5	840	708000	4715	236	284	24	M24	350	885000
			310								762000	4910						952500
			320								814500	5090						1018125
400	x	680	315	480	227	212	96	188	118,5	840	765000	4855	231	285	24	M24	370	956250
			320								788000	4927						985000
			330								845000	5125						1056250
420	x	690	330	504	253	238	111	214	131,5	840	999000	6055	241	302	30	M24	410	1248750
			340								1068000	6285						1335000
			350								1140000	6515						1425000
440	x	750	340	527	269	252	115	224	138,5	1250	1058000	6230	231	283	24	M27	540	1322500
			350								1130000	6460						1412500
			360								1204000	6690						1505000
460	x	770	360	547	269	252	115	224	141	1250	1320000	7440	257	312	28	M27	540	1650000
			370								1420000	7700						1775000
			380								1500000	7950						1875000
480	x	800	380	580	291	274	128	246	152	1250	1535000	8080	241	302	30	M27	650	1918750
			390								1626000	8340						2032500
			400								1720000	8600						2150000
500	x	850	400	600	291	274	128	246	152	1250	1750000	8750	246	309	32	M27	750	2187500
			410								1840000	8980						2300000
			420								1940000	9250						2425000

More sizes on request
To continue see next page

Shrink Discs RINGFEDER® RfN 4091

Explanation

d = Inner diameter	L₂ = Thrust ring width	P = Hub surface pressure
D = Outer diameter	L₃ = Width of ring	σ_v = Equivalent stress in the hub
d_w = Solid shaft diameter	L_B = Width of the half Shrink Disc	n_{sc} = Quantity of screws
d₁ = Pitch circle diameter	T_A = Max tightened torque of the clamping screws	D_G = Thread
L = Overall length	T = Transmissible torque at given T _A	G_w = Weight
L₁ = Overall length (without screws)	F_{ax} = Transmissible axial force	T_{max} = Max. transmissible torque

Ordering example

Series	d	D
RfN 4091	100	170

Table Clearance

d _w		ISO	Max. clearance S mm
above	up to		
6	10	H6/j6	0,011
10	18		0,014
18	30		0,017
30	50	H6/h6	0,032
50	80	H6/g6	0,048
80	120	H7/g6	0,069
120	180		0,079
180	250		0,090
250	315		0,101
315	400		0,111
400	500		0,123
500	630		0,136
630	800	0,154	

Technical information

- Surface finishes: For shaft R_a ≤ 3,2 μm
- Tolerances: For shaft see table
- When using a hollow shaft instead of a solid shaft please contact our Engineering-Team.
- Additional loads, e.g. tension, thrust or bending have to be taken into consideration accordingly
- Function values: The functional characteristics are valid with the screw tightening torque listed in the tables and the following assumed conditions: The locking screws are lubricated using MoS₂ (μ_{tot} = 0,1). The tapered cones are lubricated using MoS₂ (μ = 0,05). The contact surfaces (d_w) are in lightly oiled condition with coefficient of friction μ = 0,12. The hub and shaft materials have a modulus of elasticity of 210,000 N/mm². (Lower values result in increased values for T and Fax with reduced tangential stress.) The maximum clearance S is being fully utilized. The shaft being used is solid, for hollow shaft applications the functional values will change. In cases where the assumed conditions do not apply then contact our Technical Department where we will be happy to assist you with your application.

Clearances considered for the calculation of the function values

Further information on
RINGFEDER® RfN 4091 on
www.ringfeder.com

Disclaimer of liability

All technical details and notes are non-binding and cannot be used as a basis for legal claims. The user is obligated to determine whether the represented products meet his requirements. We reserve the right carry out modifications at any time in the interests of technical progress.